







-  Isolate vibration & eliminate noise transmission
-  Suitable for both LPHW and chilled water
-  Corrosion resistant and maintenance free
-  Potable water grade Bellows available

### FLEXIBLE BELLOWS

United Flexible Bellows are moulded and fabricated units, eliminating pipe line noise transmission.

Available with standard and non standard flange drilling, they cater for a wide range of Building Services or Industrial applications including:

- Chilled Water
- LPHW
- Pressures up to 16 bar
- Temperatures up to 85 degrees centigrade


Manufactured to a high standard, the units are:

- 100% leak proof.
- Corrosion resistant.
- Maintenance free.

They can be incorporated in a variety of designs to solve noise problems and isolate vibration, making them popular additions at pump suction/discharge connections.


**Standard flange drilling  
conforms to BS4505 NP6  
or NP16**

**Discuss alternative drilling  
requirements with our  
Technical Sales Advisors**

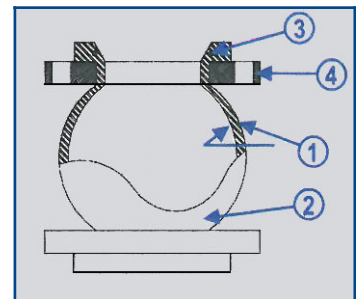

Component Materials		
Item	Part	Material
1	Body	Heat Resisting Rubber
2	Body	Nylon Tyre Cord
3	Wire	Hard Steel Wire
4	Flange	Mild Steel

**Maximum Working Pressure @ 50 C = 7 bar**  
**Maximum Working Pressure @ 85 C = 3.5 bar**  
 (Typical application values, check with our sales advisors)

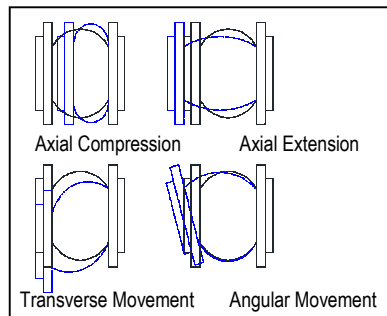

Nominal Diameter		Natural Installed Length	Allowable Movements from Natural Length				Pressures	
		mm	Axial Compression (mm)	Axial Extension (mm)	Lateral Deflection (mm)	Angular Deflection (mm)	Positive P.S.I.G at Deg C	Vacuum (mm)
Inch	mm	125	10	5	10	10	225	660
1 1/4"	32	125	10	5	10	10	225	660
1 1/2"	40	125	10	5	10	10	225	660
2"	50	125	10	5	10	10	225	660
2 1/2"	65	125	10	5	10	10	225	660
3"	80	125	10	5	10	10	225	660
4"	100	125	10	5	10	10	225	660
5"	125	125	10	5	10	10	225	660
6"	150	125	7	5	7	7	225	660